

### FEATURES

- Scans upto 24 Channels
- Universal input
- Advanced - dual micro controller based
- LED display and LCD display
- User programmable
  - Alarm logic
  - Relay grouping
  - Sensor break logic
  - Channel name – 8 Char
  - Alphanumeric LCD display
  - Units display
- Front panel calibration
- 20000 count optically isolated ADC
- Self diagnostics with error code
- Universal power supply




DV9800E is the extended version of our very popular Scanner DV9800. It incorporates advanced software features and a dual micro controller based design to provide complete user flexibility and can cater to almost all monitoring and data acquisition needs of the user. It can be user programmed to cover different application needs thus reducing time, inventory and spares cost. It scans and accepts 24 direct signals from thermocouples, RTDs and linear voltage and current inputs, either as fixed type or programmable universal input. Each channel is sequentially scanned and active channels are displayed. Also it has the feature of alphanumeric LCD for user selectable multi-parameter display. Individual channels can be locked for monitoring using the HOLD key. Flexible alarm logic and grouping is provided to energize alarm relay outputs as per the process parameter values and programmed set points.

### INPUT TABLE

INPUTS	TYPE & RANGE	RESOLUTION
Thermocouple	8 types: J =0 to 700, K =0 to 1200, R= -50 to 1765, S=0 to 1766, T=-100 to 400, E=-100 to 1000, B= 250 to 1820, N= 0 to 1800	1 Deg
RTD	PT100 (DIN 43760 / IEC 751) =0 to 600, PT46 =0 to 200, Ni100 (0.672 and 0.618) = 0 to 200, Cu53 =0 to 150, Cu10 = -100 to 200C, Others consult factory	PT100: 1 & 0.1 Deg Others: 1 Deg
DC Volts	0 to 5V or 1 to 5V Range -1999 to +9999 programmable.	1 to 0.001
mA	0 to 20mA or 4 to 20mA Range -1999 to +9999 using 150 ohms conditioning resistance.	1 to 0.001

**SPECIFICATIONS:**

Inputs	Refer input Table, Universal or Fixed input.
No of channels	24 channels
Input Connections	Rugged screw terminals suitable for 0.2 to 2.5 mm sq mm cable
Input Impedance	> 1 Meg Ohm
Output	Up to 6 Relays
Relay Grouping	Programmable – Any alarm can be assigned to any relay.
Relay Rating	1 C/O, 5 Amps / 230VAC resistive max.
Alarm set points	Two individual alarm settings per channel
Display	<ul style="list-style-type: none"> <li>LED Display: 12.7 mm, 7segment Red Led - 2 digits for channel value, 4 digits for process value; Individual Alarm &amp; Trip LEDs for each channel; Prog, Run, Hold, Error and Relay status LEDs</li> <li>LCD Display: 2 lines X 16 characters backlit LCD for user selectable multi-parameter display</li> </ul>
Alarm LEDs	Individual A1 & A2 LEDs per channel, Latching or non Latching
ADC	20,000 count optically isolated ADC with dedicated microcontroller
Compensations	Automatic - Cold junction for TC, Wire resistance for RTDs
Accuracy	+/- 0.1 % FS, +/- 1 count
Resolution	Programmable as per Input table.
Noise Rejection	Common mode 120 dB or better, Series mode 60dB or better.
Alarm Logic	Programmable High, Low, Very High, Very Low Latching & Non Latching
Display Scan	1 to 99 seconds programmable, Auto and Manual with HOLD
Internal Scan Rate	10 channels per second
Real Time Clock	Optional real time clock calendar for data printout with time stamp.
Battery Backup	Non-volatile EEPROM, Battery not required.
Power Supply	Universal 90-260VAC / 110-250VDC, 10VA max or 24V DC +/- 10%, 0.5A max (as per ordering code)
Sensor break / Error	Programmable Enable or Disable Alarm with 'open' / 'short' indication.
Protection	Password protection for configuration, Watchdog for system monitoring.
Environment	Temp: -10 to + 60 Deg C Max. RH: Up to 95% non condensing
Enclosure	Robust metallic powder coated enclosure with plastic bezel.
Protection Class	IP65 Front panel
Mounting	Flush on panel with screw type clamps 2 Nos
Dimensions	External: 144(W) X 144 (H) X 250 (D) mm.
Panel Cutout	138 X 138 mm.
Weight	2.5 Kg max.
Accessories	2 Nos Screw clamps for mounting, 150 Ohms conditioning resistances if mA inputs provided

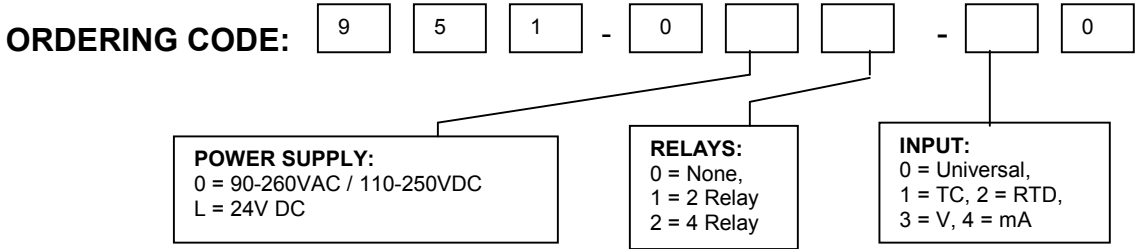

**SAMPLE ORDER CODE:**  
**951-001-00**  
 2 RELAYS, UNIVERSAL  
 INPUT