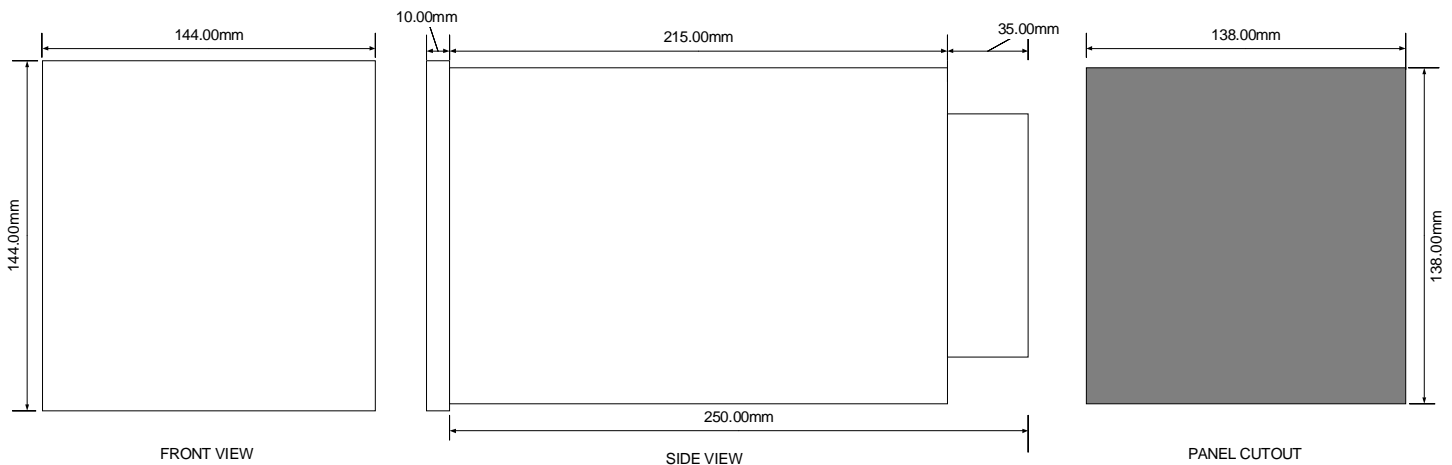


SPECIFICATIONS:

Supply voltage	:	Universal SMPS suitable for 95 to 265V AC and 110 to 300V DC
Number of channels	:	15 maximum
		§ GD – 1
		§ CE – 7
		§ EE – 7
Display	:	§ Bright red LED for channel number and value
		§ 2 line × 16 character alphanumeric LCD backlit display for programming and status indication
Relay outputs	:	1 CO relay output
Output rating	:	3 A, 230 V AC Non-inductive
Remote ON/OFF input	:	Potential free N/O contact
Keypad	:	Eight keys sealed membrane keypads with tactile switch
Signal & Power connection	:	Screw connectors suitable for 1.5/ 2.5 sq. mm wire
Fixing arrangement	:	Panel mounted
Mounting	:	Flush panel
Overall size	:	144 (W) × 144 (H) × 250 (D) mm
Panel cutout	:	138 × 138 mm, Depth 250 mm
Ambient humidity	:	95% maximum non-condensing
Ambient temperature	:	0 - 55 Deg. C

EXTERNAL DIMENSIONS:**ORDERING CODE:**

9 8 3 - 0 0 0 - 0 0